



CP adhesives is meeting the needs of modern woodworkers with the most extensive line of industrial adhesives available. Ad-A-Luster Products Company, a CP Adhesives affiliate, has been offering quality contact cements in the Northeast for over fifty years. The CP Adhesives line of contact cements includes a wide range of flammable and non-flammable contact adhesives and as well as water based products. We offer a full line of standard and specialty contact cement products. This guide offers an overview of the primary products available.

CONTACT CEMENT PRODUCT GUIDE

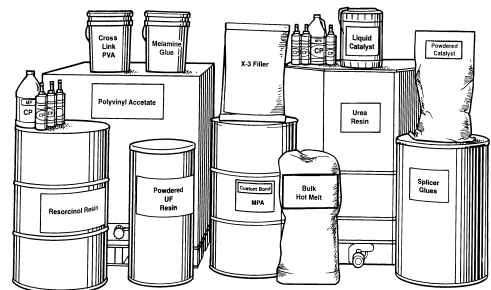

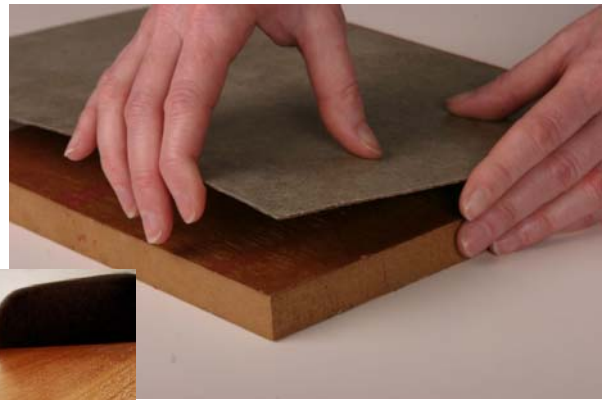

BULK CONTACT CEMENT

FLAMMABLE

Description

CP Adhesives Contact Cement has been formulated for industrial use. Every feature is designed to expedite fast, smooth production. The high adhesive solids formulations offer increased value as well as an exceptionally fast drying solvent mixture. It is unique in its combination of high initial bond strength and fast development of maximum ultimate strength. This translates into the ability of the user to proceed with machining soon after bonding.



Available in 5 gallon pails and 55 gallon drums

Technical Data

Base	Compounded Neoprene	
	<u>Spray Grade (EF)</u>	<u>Brush Grade (EF)</u>
Viscosity	500cps.	800-1000 cps.
Net Weight	6.8 lbs. gallon ±0.2 lbs.	7.1 lbs. gallon ±0.2 lbs.

Working Qualities

Suitable for hot and cold spray applications and brush or roll coating depending on formulation. Offers high resistance to water, oil, alcohol and most aliphatics.

	<u>Spray Grade (EF)</u>	<u>Brush Grade (EF)</u>
Heat resistance	Excellent	Excellent
Machine after how long	Immediately	Immediately
Available colors	Red/Clear	Clear
Products	CP-1381/CP-1380	CP-1352
Postforming possible	Yes	Yes
Coverage (1gallon)	~ 180 sq. feet	~ 200 sq. feet
Shelf life	1 Year	1 Year



Recommended Spray Equipment

1. Devilbliss JGA-502 or MBC gun 704, 765, 770, 32 or 34 air cap: FF. Or FX or E Fluid tip and needle.
2. Binks No.18 or 69 gun; 63C fluid nozzle and 63B air cap.

Use atomizing pressure of 60-90 psi, and a tank or fluid pressure of 20-40 psi.

For best results on hot spray equipment, temperature should be approximately 120°F

DO NOT USE COPPER AND ITS ALLOYS

***EF—Extremely Flammable**



BULK CONTACT CEMENT

NON-FLAMMABLE

Description

CP Adhesives Non-Flammable Contact Cement has been formulated for industrial use in situations where fire hazards exist. It offers every advantage of the standard formulation with the additional advantage of being non-flammable. In addition, it offers high initial tack and the ability to allow users to machine soon after bonding.



Technical Data

Base	Compounded Neoprene
Viscosity	900 cps.
Net Weight	10.5 lbs. / gallon ± 0.2 lbs.



Working Qualities

Suitable for spray application or brush or roll coating depending on formulation. Offers high resistance to water, oil, alcohol and most aliphatics.

Spray Grade

Heat resistance	Excellent
Machine after how long	Immediate
Available colors	Clear/Red
Products	CP-1374/CP-1375
Postforming Possible	Yes
Coverage	250-300 sq. feet
Shelf Life	6 months
Cleanup	N/F Solvent
Harmed by freezing	No



Recommended Spray Equipment

Devilbliss JGA-502 or MBC gun 704, 765, 770, 32 or 34 air cap: FF, FX or E Fluid tip and needle.
 Binks No. 7, 18 or 19 gun; 33 PM, 63 PB or 66 PE air cap 63 fluid tip and 63A needle
 Use atomizing pressure of 60-90 psi, and a tank or fluid pressure of 10-20 psi.
 For use on hot spray equipment, contact your equipment supplier for specific recommendations.
DO NOT USE WITH COPPER AND ITS ALLOYS



PRE-PRESSURIZED CONTACT CEMENT



The CP Adhesives line of canister adhesives are premium contact cements. Canister adhesives provide convenience and economy in hundreds of applications across numerous industries including millwork, building, HVAC, marine, and insulation. All of the canister formulations use only S.I.S.

Contact Cement Formulations

True contact cements are dry to the touch a few minutes after being applied. They offer increased durability and heat resistance for applications like bonding high pressure laminate, edge banding, and other overlays where a permanent bond is required.

CP-1304 Natural

High temperature, high strength contact adhesive with non-flammable solvent. Available in aerosol, standard canister (pictured), and jumbo sizes.

CP-1305 Red

High temperature, high strength contact adhesive with non-flammable solvent. Available in aerosol, standard canister (pictured), and jumbo sizes.

Related Equipment

The Canister based adhesives use industry standard connections for pressurized canisters. No air is required.

Spray Pistol

Spray Gun for pressurized canisters. Easy to use and maintain.



Spray Hose

Spray Hose for pressurized canisters. Standard length is 12'. Also available in 25' length.



11047 Lambs lane * Newark, OH 43055
P: (800) 454 4583 * F: (740) 763 2888
WWW.CUSTOMPAK.COM

